


Operating Instructions

Floor Saw FSD930 ★ ★

Index 001

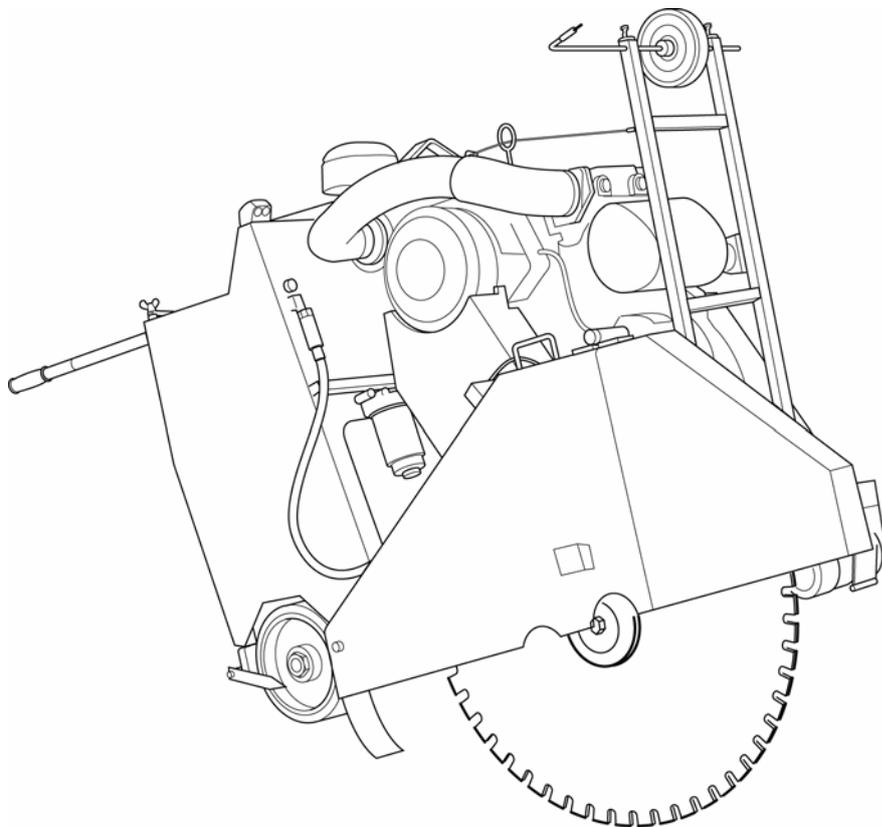

Congratulations!

You have decided to purchase a tried and tested TYROLIT-Hydrostress unit and have thus acquired a highly sophisticated and reliable state-of-the-art unit. The exclusive use of only TYROLIT Hydrostress spare parts ensures quality and interchangeability. If maintenance work is neglected or carried out inexpertly we will be unable to honour our warranty obligations. Any repair work must be carried out by trained personnel only.

Should you need more details concerning your TYROLIT Hydrostress unit in order to keep it in perfect condition, please contact our after-sales service for further information.

We hope that you enjoy untroubled and fault-free working with your TYROLIT unit.

TYROLIT Hydrostress

Copyright© TYROLIT Hydrostress

TYROLIT Hydrostress AG
Witzbergstrasse 18
CH-8330 Pfäffikon
Switzerland
Tel. 0041 (0) 44 952 18 18
Fax 0041 (0) 44 952 18 00

1 Safety



These instructions are just one part of the documentation which is supplied together with the floor saw. These instructions go together with the "Safety Manual / System Description for Floor Saws" to form a complete set of documentation.




DANGER

Failure to comply with the safety instructions in the "Safety Manual / System Description" may result in serious injury or death.

- ▶ Please ensure that the "Safety Manual / System Description for Floor saws" has been read and understood in full.


2 Design

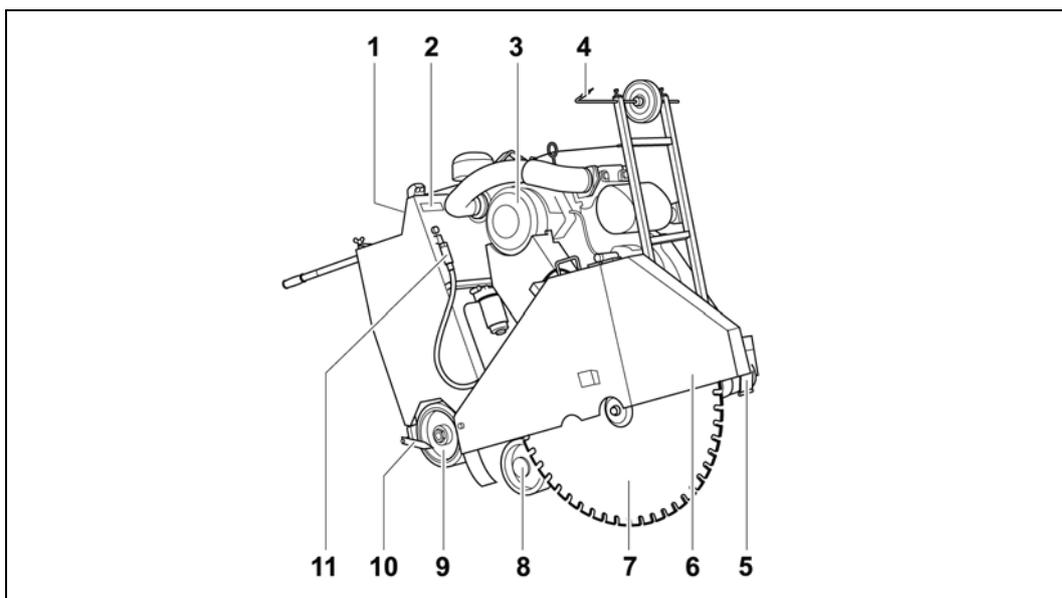

Components

- | | | | | | |
|---|-------------------|---|--------------|----|----------------|
| 1 | Operating console | 5 | Shaft cover | 9 | Drive wheel |
| 2 | Name plate | 6 | Blade guard | 10 | Rear cut guide |
| 3 | Main motor | 7 | Saw blade | 11 | Water feed |
| 4 | Front cut guide | 8 | Rocker wheel | | |


2.1 Saw blade drive

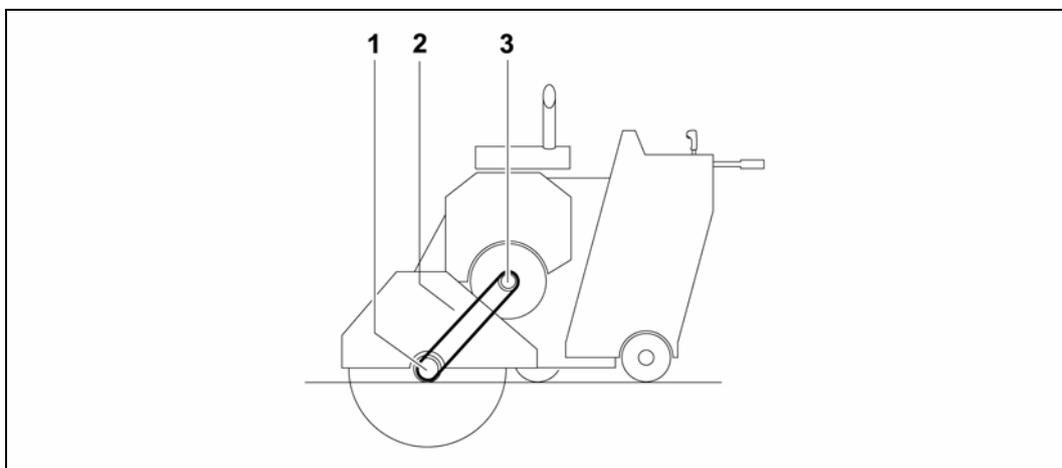

Saw blade drive (schematic)

- | | |
|---|------------------------|
| 1 | Blade drive shaft |
| 2 | Drive belt |
| 3 | Main motor drive shaft |


2.2 Lift drive

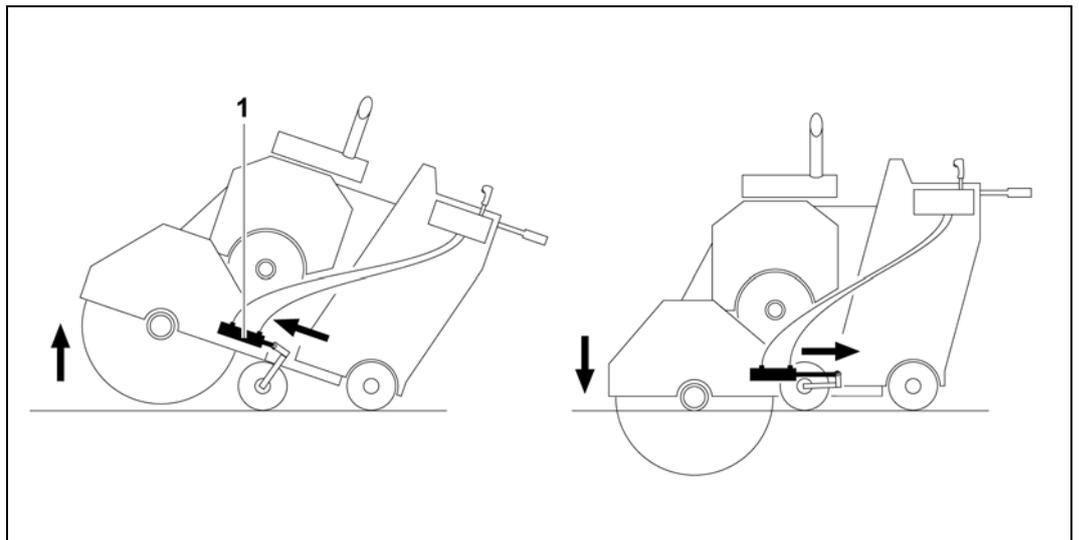

Lift drive (schematic)

- 1 Hydraulic cylinder

2.3 Travel drive

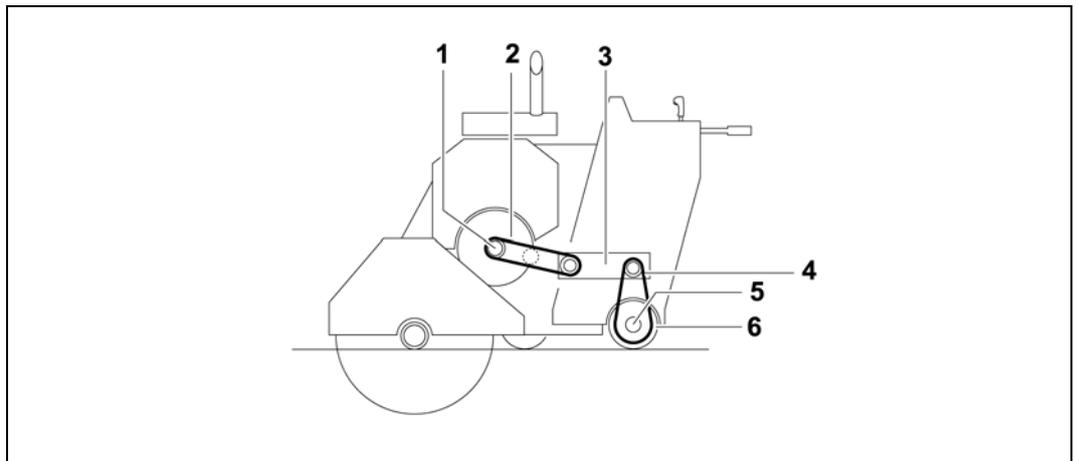

Travel drive (schematic)

- | | | |
|----------------------------|----------------------|---------------------|
| 1 Drive shaft (main motor) | 3 Hydrostatic motors | 5 Wheel drive shaft |
| 2 Hydrostat drive belt | 4 Drive chain | 6 Drive wheel |

3 Transport




DANGER

Inexpert transport may result in death or serious injury.

- ▶ Floor saws must only be transported with the main motor switched off.
- ▶ Only transport vehicles, lifting tools and load suspension devices with sufficient load-bearing capacity must be used.
- ▶ Floor saws must only be hitched by the hitching points provided.
- ▶ Appoint an expert marshaller.
- ▶ When transporting by crane do not stand underneath suspended load.
- ▶ Always have the floor saw in your line of vision while it is being transported.

3.1 Hitching points

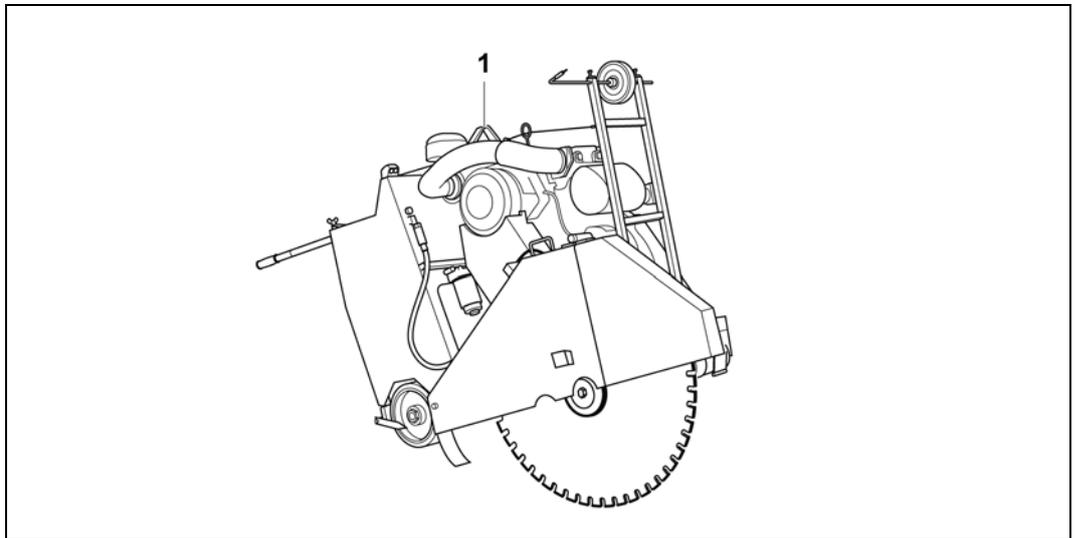


Hitching points

- 1 Crane hitching device

4 Initial start-up


4.1 Fitting battery

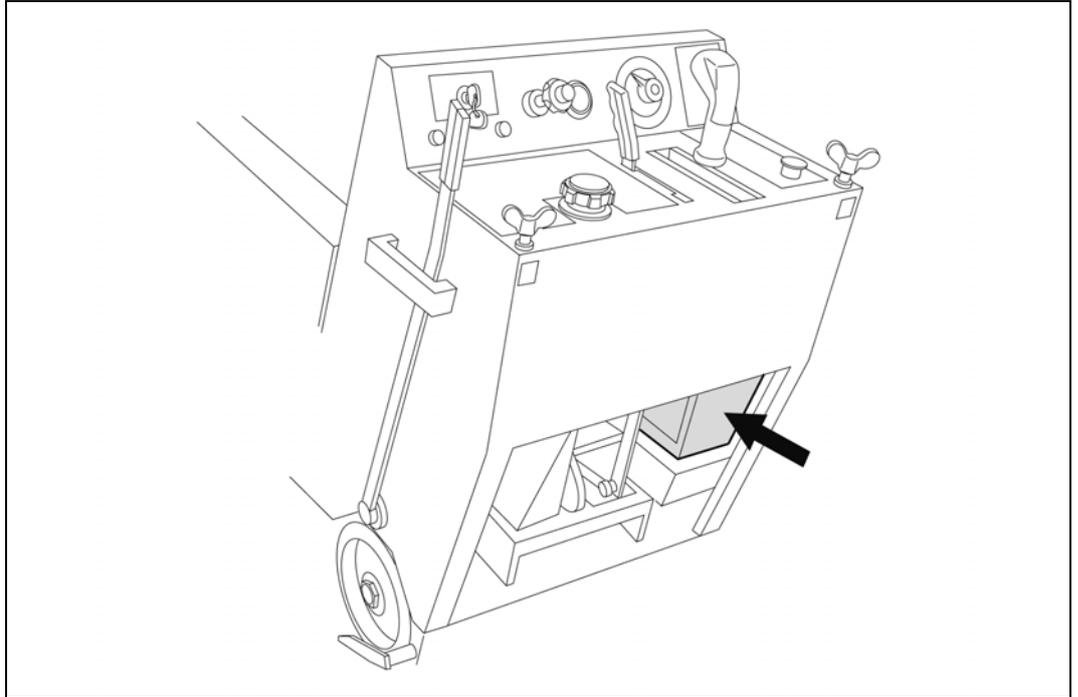


- Fit battery (for type see Technical Data).

5 Assembly / Set-up


5.1 Mounting grip

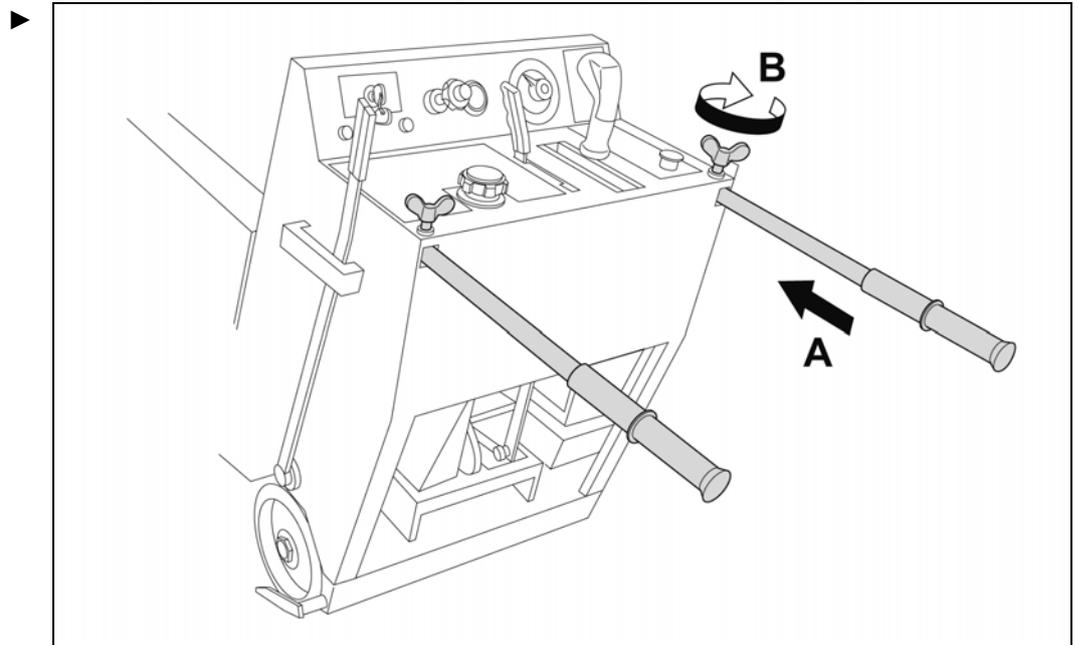

5.2 Mounting saw blade

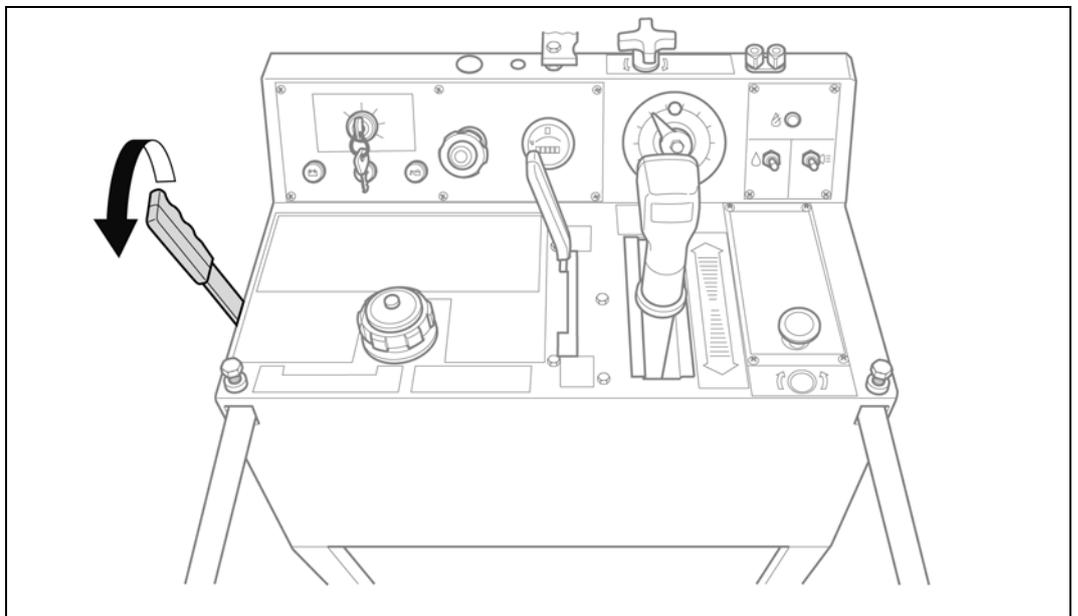

1. Apply hand brake

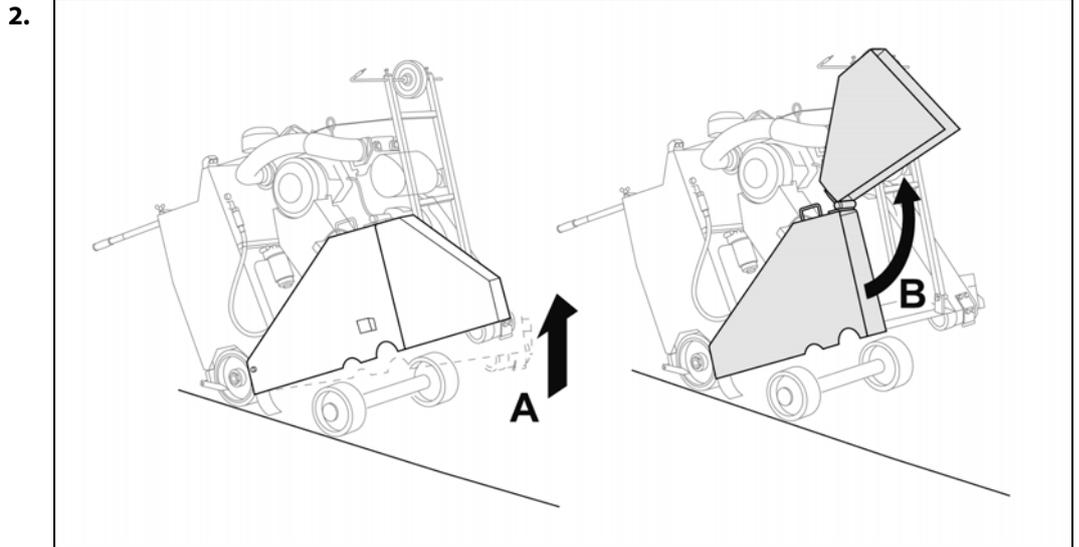


DANGER

Parts that fly off (segments, concrete splinters, saw blade, etc.) may cause serious injury or even death.

- ▶ Floor saws must only be operated with a blade guard.
- ▶ When assembling the saw blade on the right-hand side use the anchoring screw with the left-hand thread.
When assembling the saw blade on the left-hand side, use the anchoring screw with the right-hand thread.




- ▶ Note the direction or rotation arrows on the saw blade.

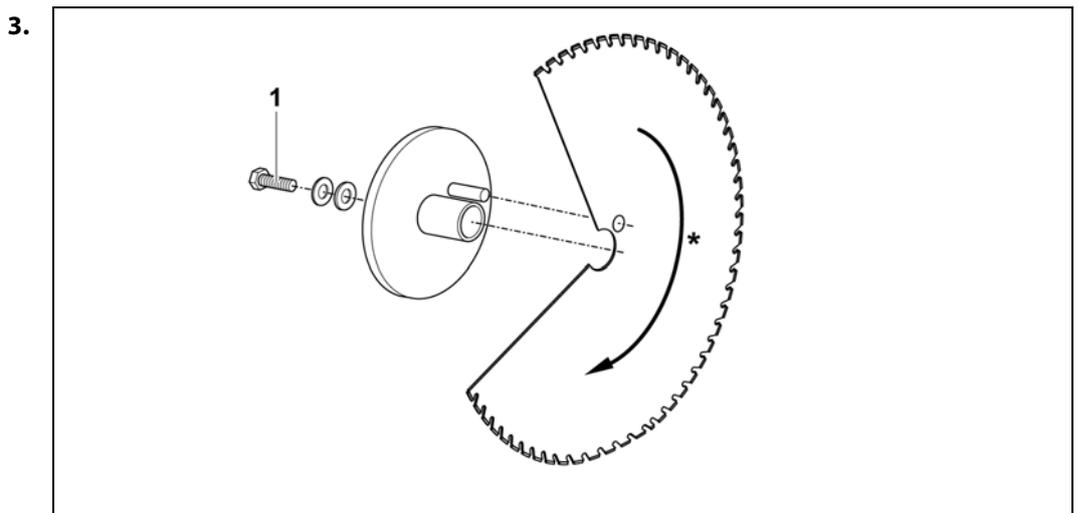

1 Anchoring screw


*Note the direction of rotation

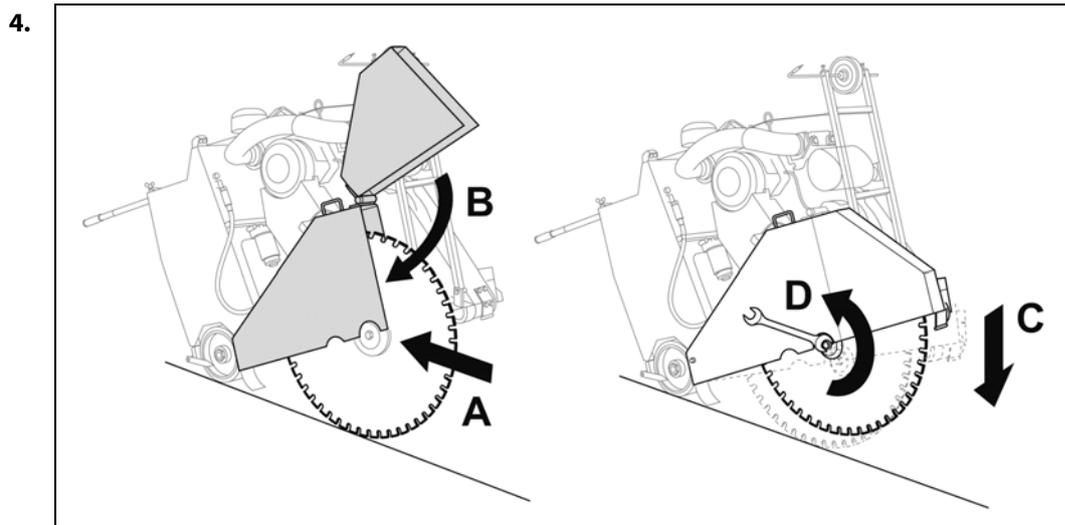


C: To prevent the saw blade rotating while being tightened, carefully place the saw blade on the floor.

5.3 Mounting saw blade on the other side

5.3.1 Disassemble the blade guard

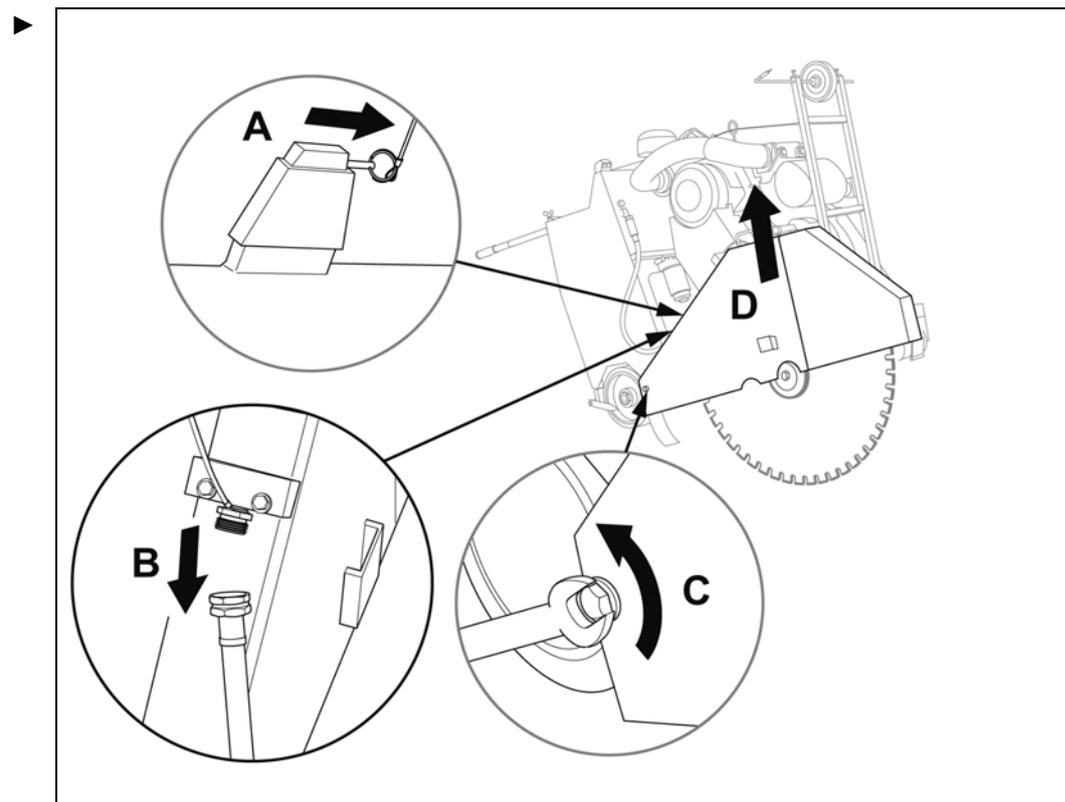


5.3.2 Disassemble the shaft cover

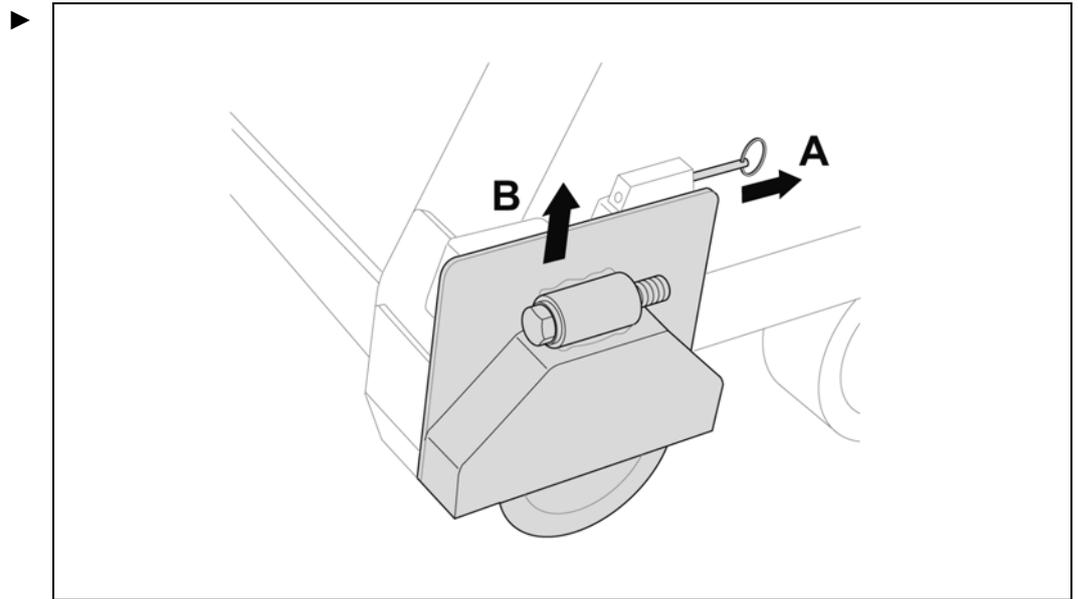

5.3.3 Assembling the blade guard and shaft cover on the other side


Assembly of the blade guard and the shaft cover is performed in the opposite order to disassembly.

5.4 Connecting water line

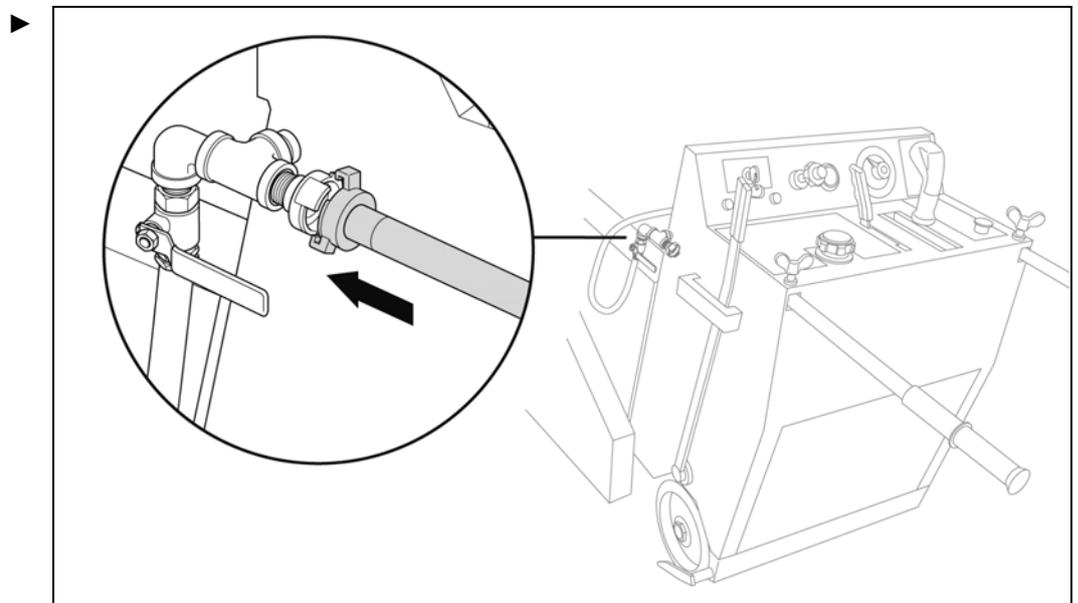

6 Operation


6.1 Overview of operating elements

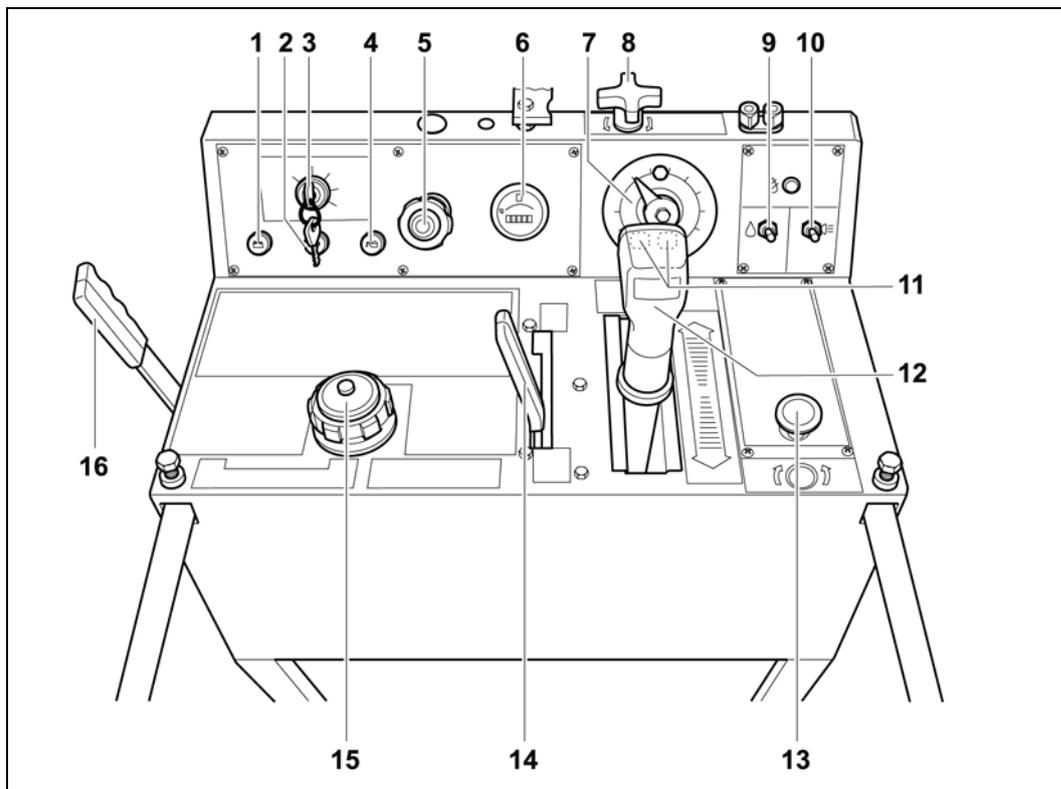

Operating elements


- | | | | | | |
|---|-------------------------|----|---|----|---|
| 1 | Battery display | 8 | Bit stop locking | 12 | Feed adjuster (forward / backward travel) |
| 2 | Oil temperature display | 9 | On / Off control for internal water pump | 13 | EMERGENCY STOP switch |
| 3 | Ignition key | 10 | On / Off control for headlight | 14 | Feed gears coupling lever |
| 4 | Oil pressure display | 11 | Raise / Lower buttons | 15 | Tank cover with tank display |
| 5 | Speed governor | 12 | Feed adjuster (forward / backward travel) | 16 | Hand brake |
| 6 | Operating hours meter | | | | |
| 7 | Cutting depth indicator | | | | |

6.2 Checking oil level

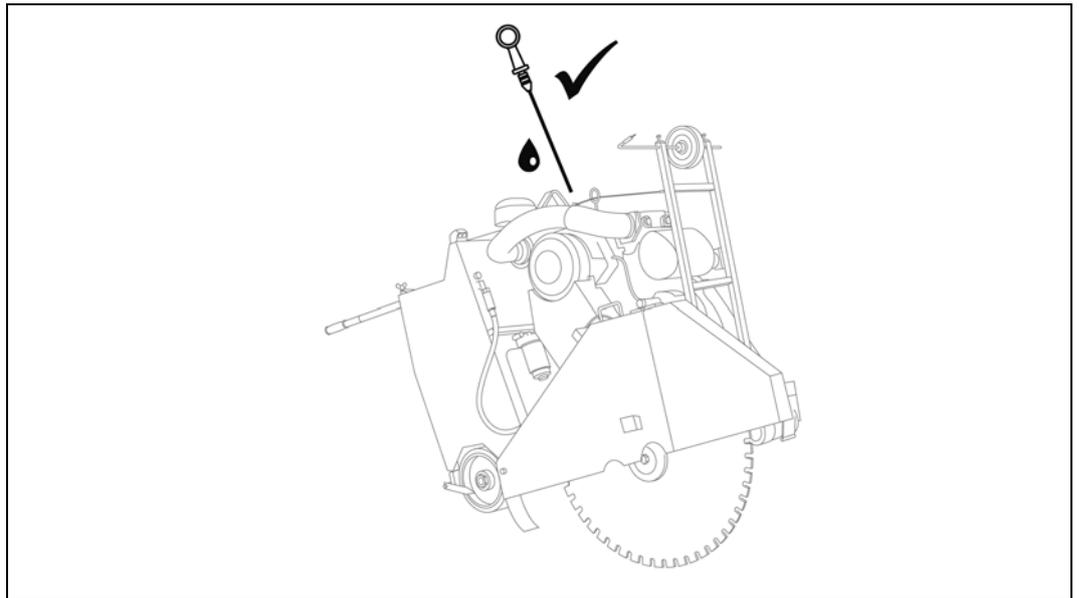

► Note the details from the motor manufacturer.

6.3 Checking the air filter

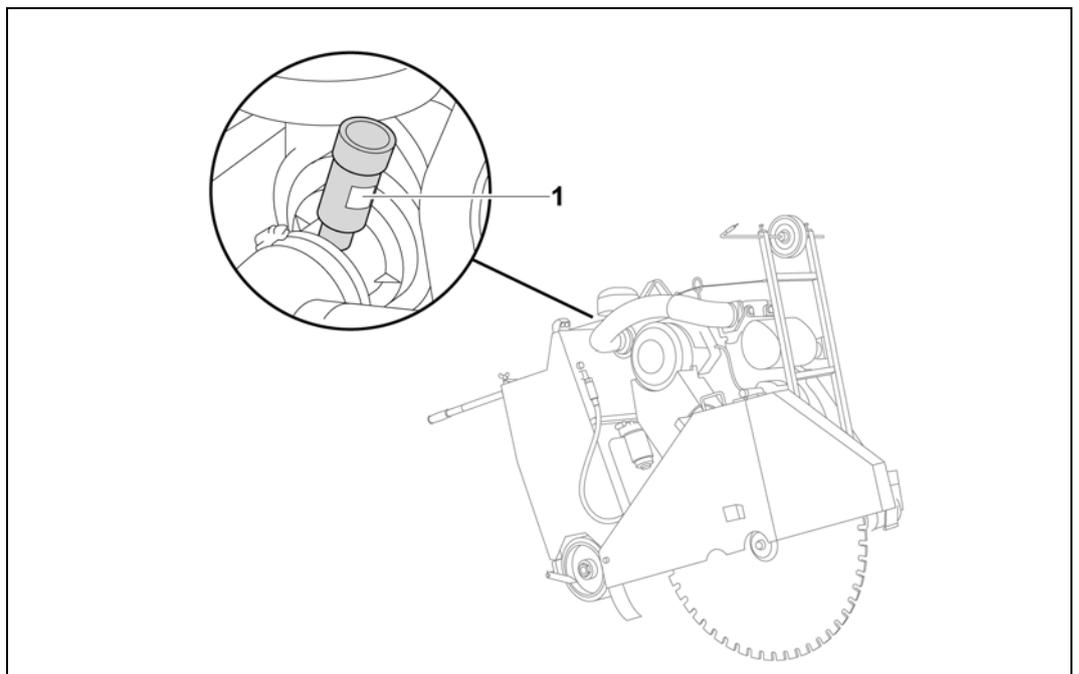


The display in the window (1) has the following significance:

Display colour	Significance
Yellow	Air filter in good order
Red	Air filter blocked

► If the air filter is blocked, it must be changed.

6.4 Checking the fuel level

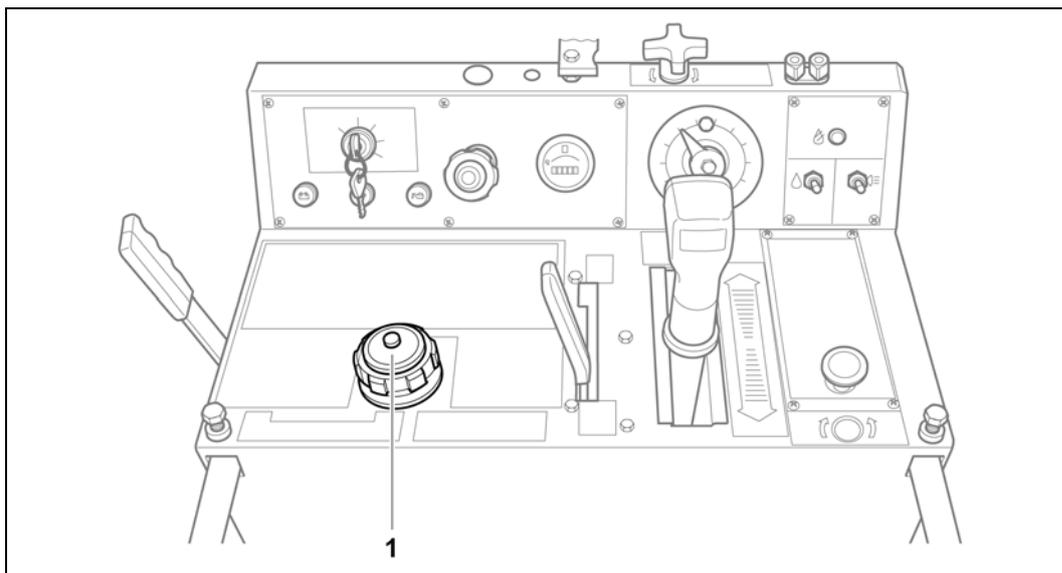


- ▶ Check the tank display (1) and top up with diesel as necessary.


6.5 Positioning the floor saw

1. Release the hand brake.
2. Slide floor saw into the working position.
3. Fit the cutting guides to the floor saw.

6.6 Connecting the water supply

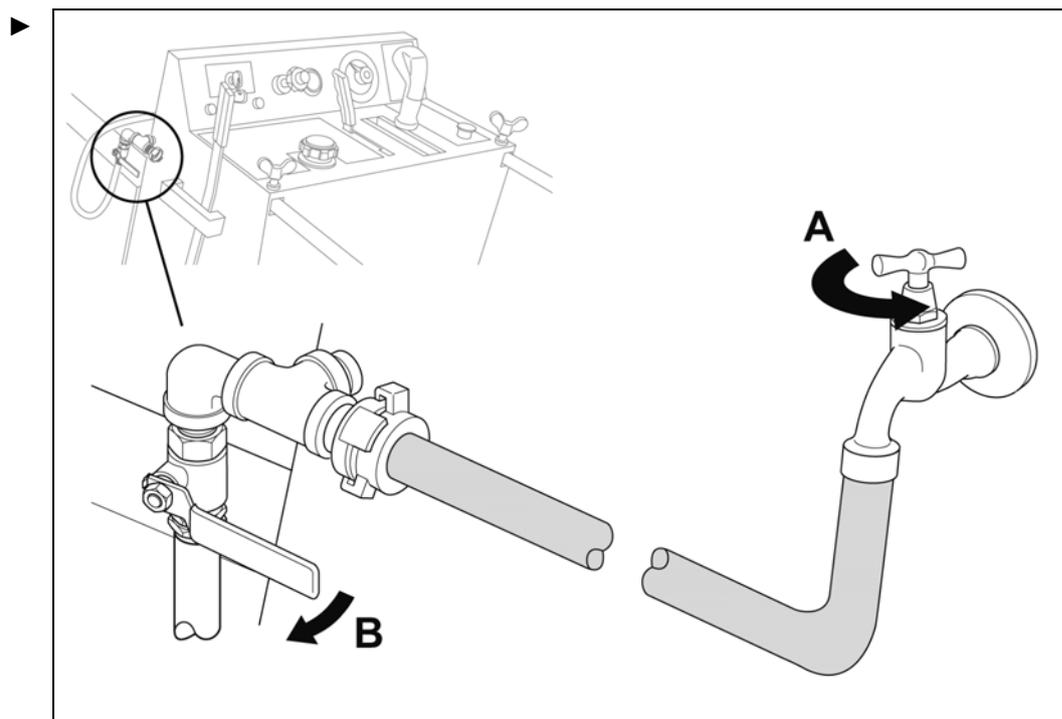

6.7 Switch on motor

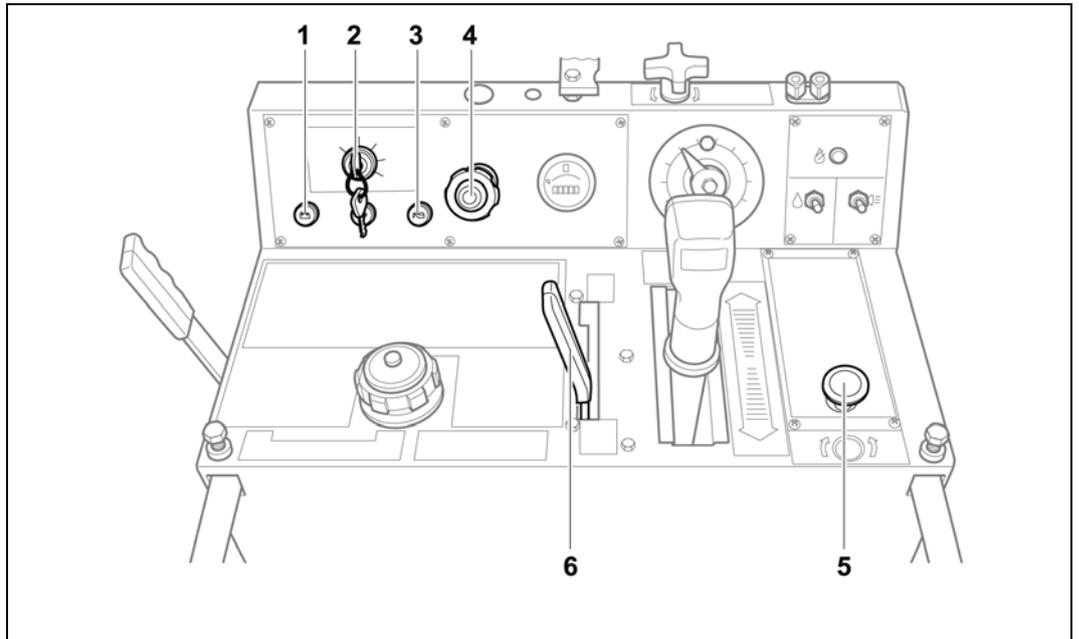


Symbol	Significance
	Coupling lever in coupled position
	Coupling lever in uncoupled position

- ✓ Coupling lever (6) is in the uncoupled position
- ✓ **EMERGENCY STOP** switch (5) has been released

1. Turn ignition key (2) to the preheat position in order to preheat the motor.
2. Turn ignition key further to the right in order to start.
Battery and oil pressure displays (1, 3) light during starting and then go out.
3. Set motor speed with speed governor (4).


6.8 Lowering / raising saw blade

6.8.1 Lowering example

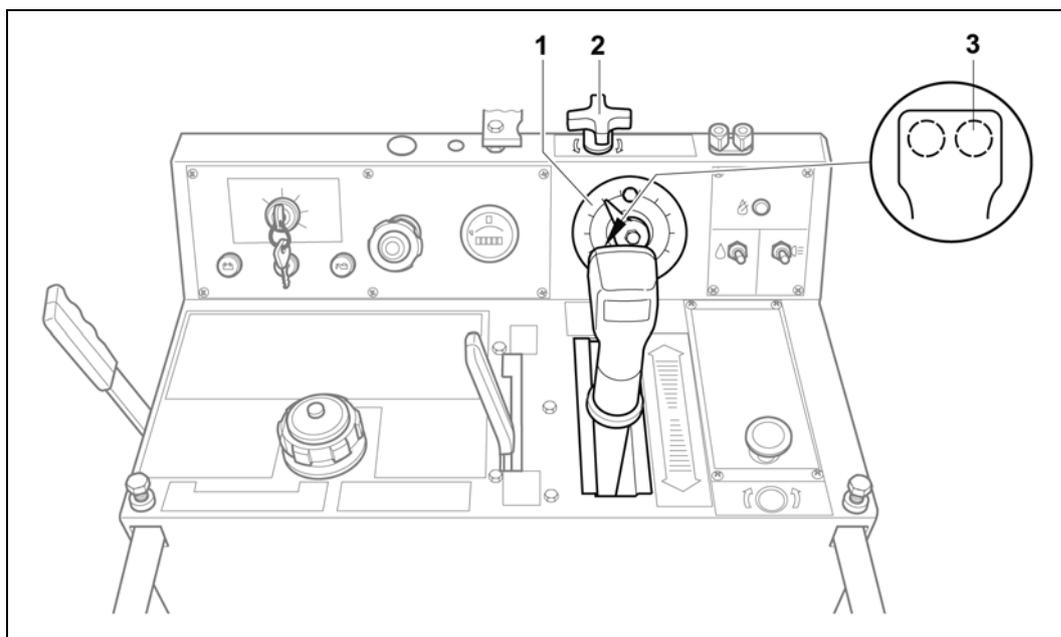

1. Press the **Lower** button (3) until the saw blade touches the material to be cut.
2. Set the cutting depth indicator (1) in the **0** position.
3. Using the **Lower** key, lower the saw blade to the desired cutting depth.
4. Tighten up the bit stop locking (2).

6.9 Adjusting the feed

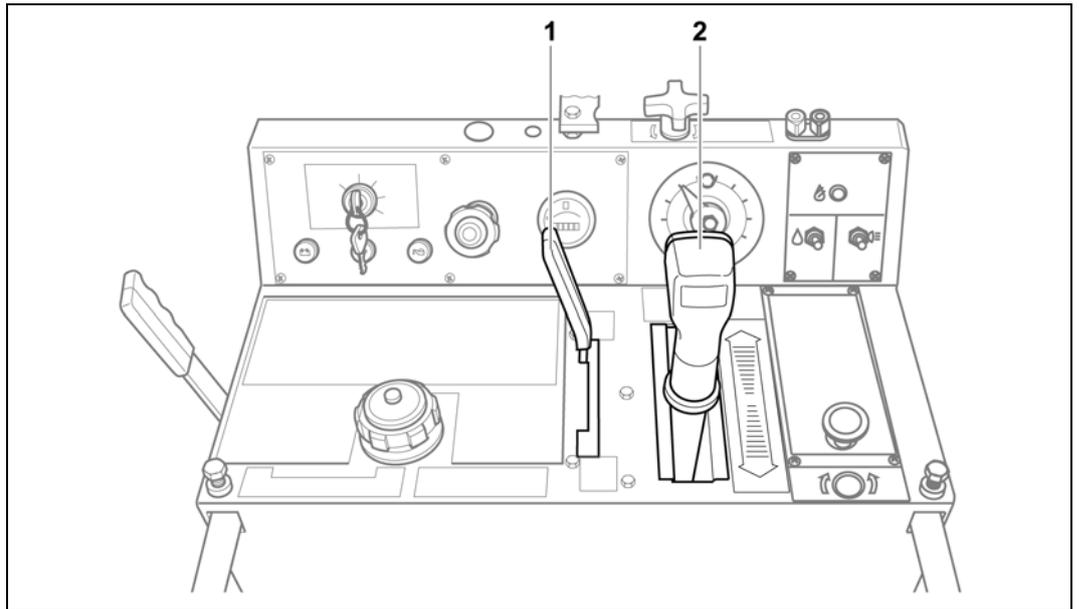


Symbol	Significance
	Coupling lever in coupled position
	Coupling lever in uncoupled position
	Feed adjuster in the forwards direction of travel
	Feed adjuster in the backwards direction of travel

- ✓ Feed adjuster is in the neutral position
- ✓ Hand brake has been released

1. Place coupling lever (1) in the coupled position.
2. Using the feed adjuster (2), set the direction of travel and speed.

6.10 Correcting the tracking

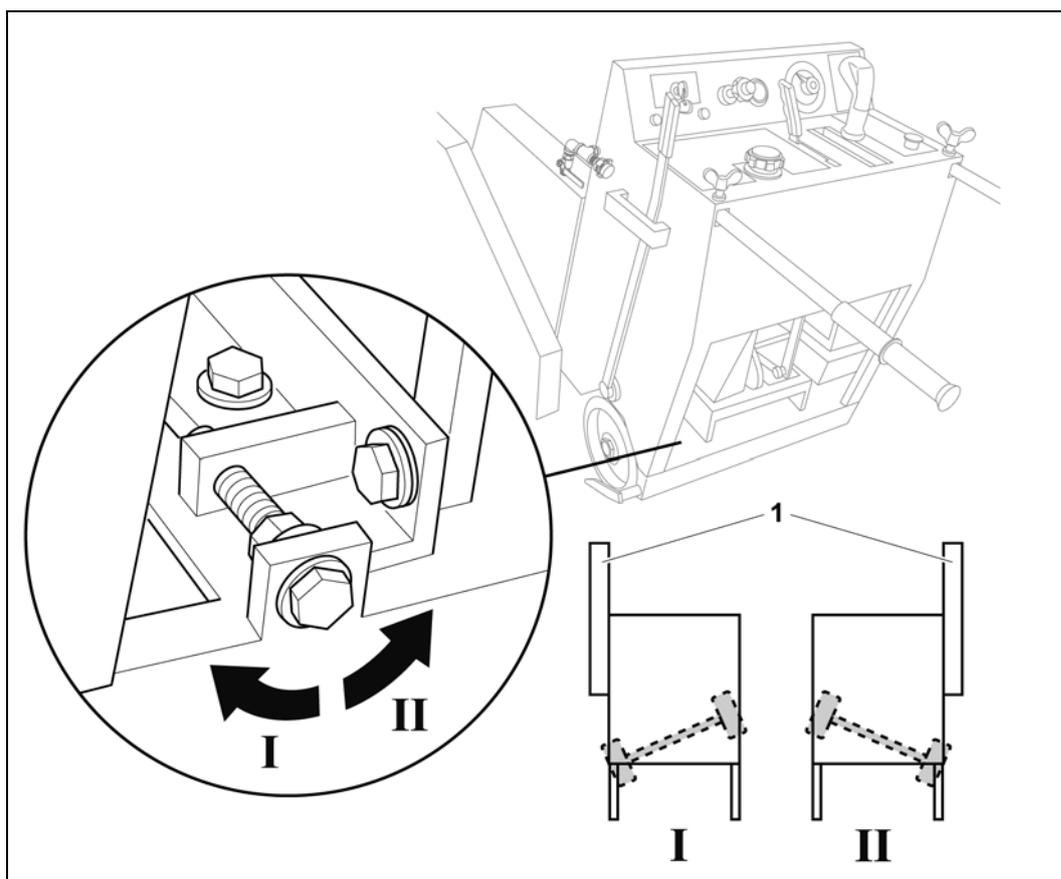

Correcting the tracking


1 Saw blade

- ▶ If the saw blade drifts, adjust the rear axle with the adjusting screw.

7 Maintenance

When?	What?
Daily	<ul style="list-style-type: none"> ▶ Check oil level. ▶ Perform a visual check for damage.
Weekly	<ul style="list-style-type: none"> ▶ Check belt and chain tension and adjust as necessary.
Every 50 hours of operation	<ul style="list-style-type: none"> ▶ Lubricate grease nipples.
Annually or every 100 operating hours	<ul style="list-style-type: none"> ▶ Arrange a major service by TYROLIT Hydrostress AG or an authorised representative.
According to the information from the motor manufacturer	<ul style="list-style-type: none"> ▶ Carry out all necessary measures in accordance with the operating instructions of the motor manufacturer.

7.1 Grease nipples

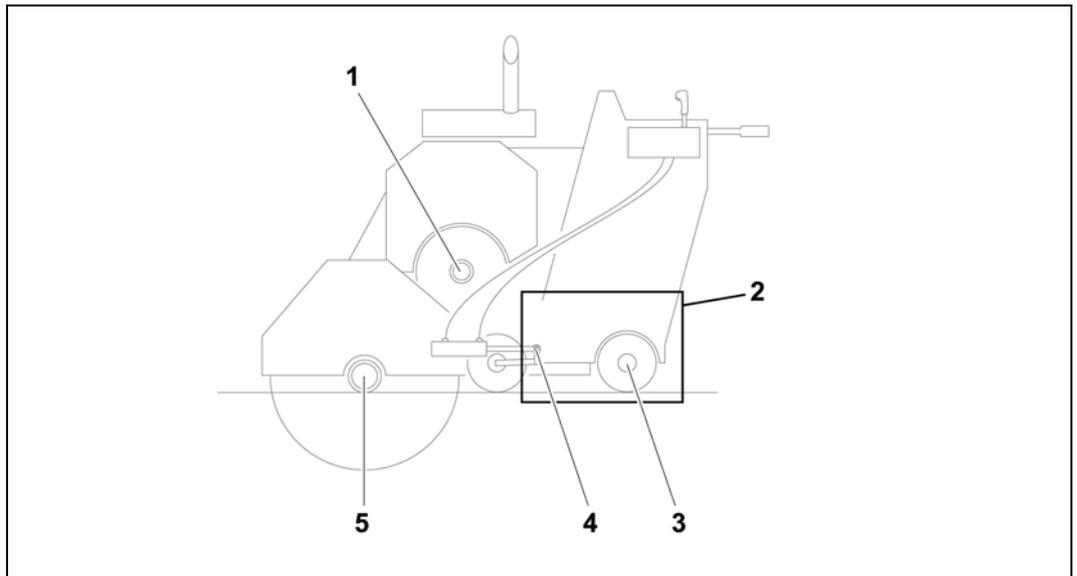


Position of grease nipples

- | | |
|---------------------------------------|------------------------------|
| 1 Motor: 1 item | 4 Cylinder eye: 1 item |
| 2 Feed adjuster control rods: 4 items | 5 Blade drive shaft: 2 items |
| 3 Wheel drive shaft bearing: 2 items | |

7.2 Tensioning belt on travel drive

- ▶ Remove the appropriate number of belt links until the belt is tensioned.

7.3 Tensioning chain on travel drive

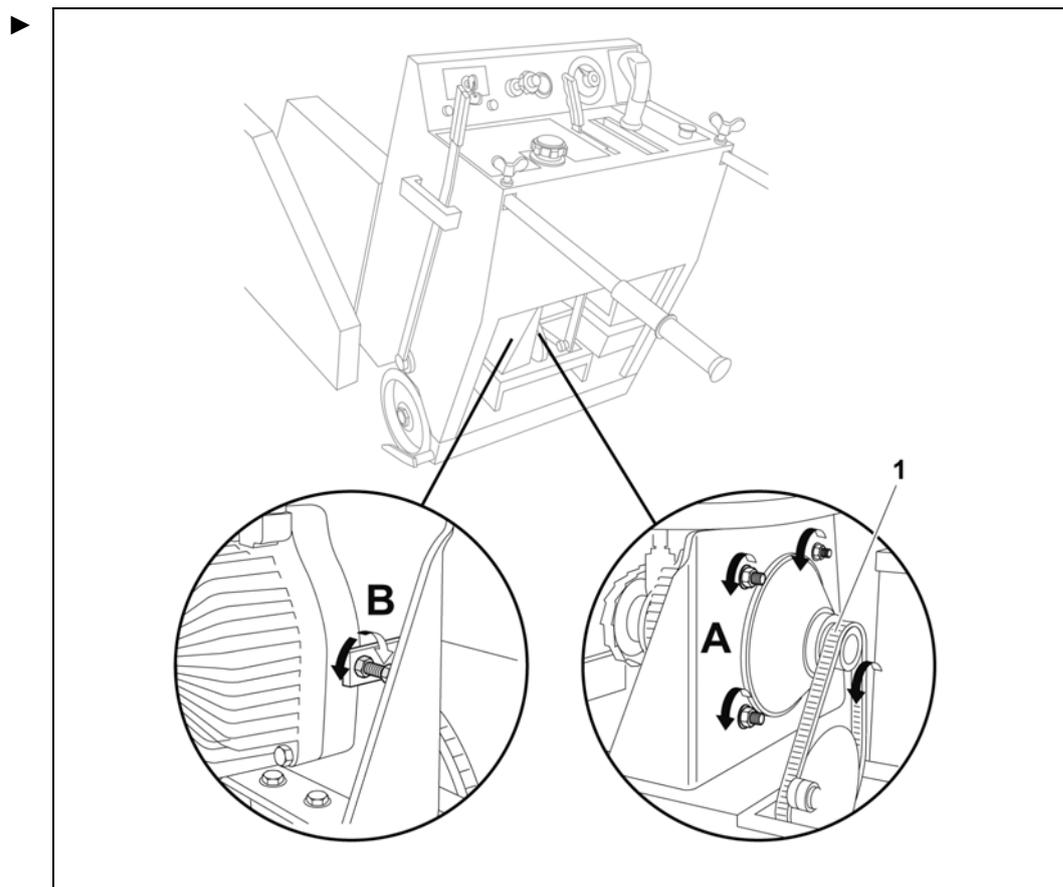

Tensioning chain

1 Chain

8 Malfunctions

Malfunction	Possible cause	Solution
Floor saw does not operate	EMERGENCY STOP switch has been pressed.	▶ Release EMERGENCY STOP switch.
Saw blade jammed	Saw blade is jammed in the cutting material	<ul style="list-style-type: none"> ▶ Reverse the floor saw. ▶ If necessary release the saw blade by rocking. ▶ If necessary stop the motor, disassemble the saw blade and release this individually from the cutting material.
Saw blade does not rotate even though the motor is running	Belt tension too slack	▶ Tension or replace belt.
	Pulling pin on the anchoring flange has sheared off	▶ Mount new anchoring flange.
Feed not working	Operation of the control rods impaired	▶ Check control rods and repair as necessary.
	Defective hydrostat	▶ Check hydrostat and if necessary have this repaired by a TYROLIT Hydrostress engineer.
	Defective chain	▶ Have the chain replaced by a TYROLIT Hydrostress engineer.
	Main motor belt slipping	<ul style="list-style-type: none"> ▶ Check belt for wear and if necessary have this replaced by a TYROLIT Hydrostress engineer. ▶ Increase belt tension as necessary.
Motor running off centre	Wrong fuel	▶ Switch off motor immediately and change fuel.
	Diesel filter blocked	▶ Have diesel filter changed.
Battery display lights	Defective contacts on the connection between battery and generator	▶ Check contacts and re-establish these as necessary.
	Inadequate battery charging	▶ Charge or change battery.
Oil temperature display lights	Oil temperature too high	▶ Allow floor saw to run under no load until temperature display goes off.
	Too little oil	▶ Top up oil.
Oil pressure display lights	Defective oil pump	▶ Have oil pump changed.

9 Technical data

9.1 Dimensions

Parameter	Value
Weight	612 kg
Cutting depth (max.)	350 mm
Blade uptake diameter	25.4 mm
Max. saw blade diameter	900 mm
Dimensions (transport dimensions with blade guard folded up)	L: 1,280 mm W: 810 mm H: 1,180 mm

9.2 Motor

Parameter	Value
Type	DEUTZ
Power	30 PS
Rated speed	According to operating instructions from motor manufacturer
Oil content	According to operating instructions from motor manufacturer
Tank content	22.8 l
Fuel	Diesel
Cooling	Air cooling

9.3 Lift drive

Parameter	Value
Drive type	Electro-hydraulic
Oil grade	ATF Dexron II D

9.4 Travel drive

Parameter	Value
Drive type	Hydraulic
Oil grade	ATF Dexron II D
Cooling	Air cooling by means of cooling ribs

9.5 Noise level and vibrations





Parameter	Value
Noise level at the ear of the user (L_{eq})	95.4 dB(A)*
Noise level at workplace (L_{PA})	91.7 dB(A)*
Sound power level in accordance with ISO 3744 (L_{WA})	111.8 dB(A)*
Vibrations DIN EN ISO 5349-2	< 2.5 m/s^2

630 Value applies under the following condition: Travel drive is switched off and the saw blade is not engaged. The measurement is performed with the motor under full load with the saw blade dia. 900 mm. Higher noise levels may be generated in cutting operation.

9.6 Battery

Parameter	Value
Description	Battery 12-Volt, Group Size 34
DP battery part number	2700208
Length	260 mm
Width	173 mm
Height	200 mm
Capacity	630 Amps
Manufacturer's reference	P7405

9.7 Cutting data

Blade diameter	Blade rpm	Belt pulley diameter Output shaft	Belt pulley diameter Motor	Motor rpm	Flange diameter Blade holder	Depth of cut
350	3000	3.65"	3.65"	3000	4½"	75
500	2475	4.12"	3.65"	2800	4½"	150
600	1900	4.12"	3.12"	2500	4½"	200
700	1650	4.75"	3.12"	2500	6"	250
900	1400	4.75"	3.12"	2150	6"	350
						



The belt pulley should only be changed by an engineer from TYROLIT Hydrostress or a trained worker.

EC declaration of conformity

Description	Floor Saw
Type designation	FSD930 ★ ★
Year of construction	2007
Manufacturer	TYROLIT Hydrostress AG

We declare under our own liability that this product complies with the following directives and standards:

Directive applied

Machine Directive	2006/42/EC
Noise Emission	2000/14/EC
Electricity Directives	93/68/EEC
Electromagnetic Compatibility	89/336/EEC
2002/95/EC Restriction of the use of certain hazardous substances in electrical and electronic equipment	2002/95/EC
Waste Directive	2002/96/EC
Vibration Directive	2002/44/EC

Standards

EN 12100-1	Safety of machinery – Basic concepts, general design principles.
EN 12100-2	Safety of machinery – Basic concepts and general principles for design.
EN ISO 14121	Safety of machinery – Principles of risk assessment.
EN 294	Safety of machinery – Safety distances to prevent upper limbs reaching danger areas.
IEC 60204-1	Safety of machinery – Electrical equipment of machines, General Requirements.
IEC 6100-6-3	Electromagnetic Compatibility
EN 13862	Floor cutting-off machines. Safety.
EN 349	Safety of machinery – Safety distances to avoid crushing of body parts.
EN 982	Safety of machinery Safety requirements for safety systems and their components – hydraulics.
EN ISO 3744	Acoustics - Determination of sound power levels of noise sources using sound pressure